

The side winder gate is normally used in heavy duty situations or in places which lack space for installing a swing gate. For example, when an entrance needs to be completely sealed, the side winder gate has to withstand large water pressure.

The side winder gate seals with a thick rubber strip around the frame, and the packing system inside the gate automatically steer the pillar outward against the outer frame or outer structure until it's tightly sealed.

The side winder gate can be designed in either automatic mode or manual motion. Apart from the gate itself, an automatic floor cover lifter or a manual floor cover casing is also critical.

The motion begins when a detector is triggered by above-standard water level. The floor cover lifts up, and simultaneously the side winder moves into place. Then, the packing system packs to seal.

The beeping sound lasts during the whole process in motion with flashing light. When switching to manual motion, simply take away the floor cover casing and slide out the gate. The final packing can be done with a spinning wheel on the gate surface to ensure the gate is fully sealed.



(Before motion)



(During the motion, the floor lifter raises up)



(After the motion)



(Gate closed with floor cover lifted)





(Floor cover lifter)

(Gate in super heavy duty)



SECTION BB

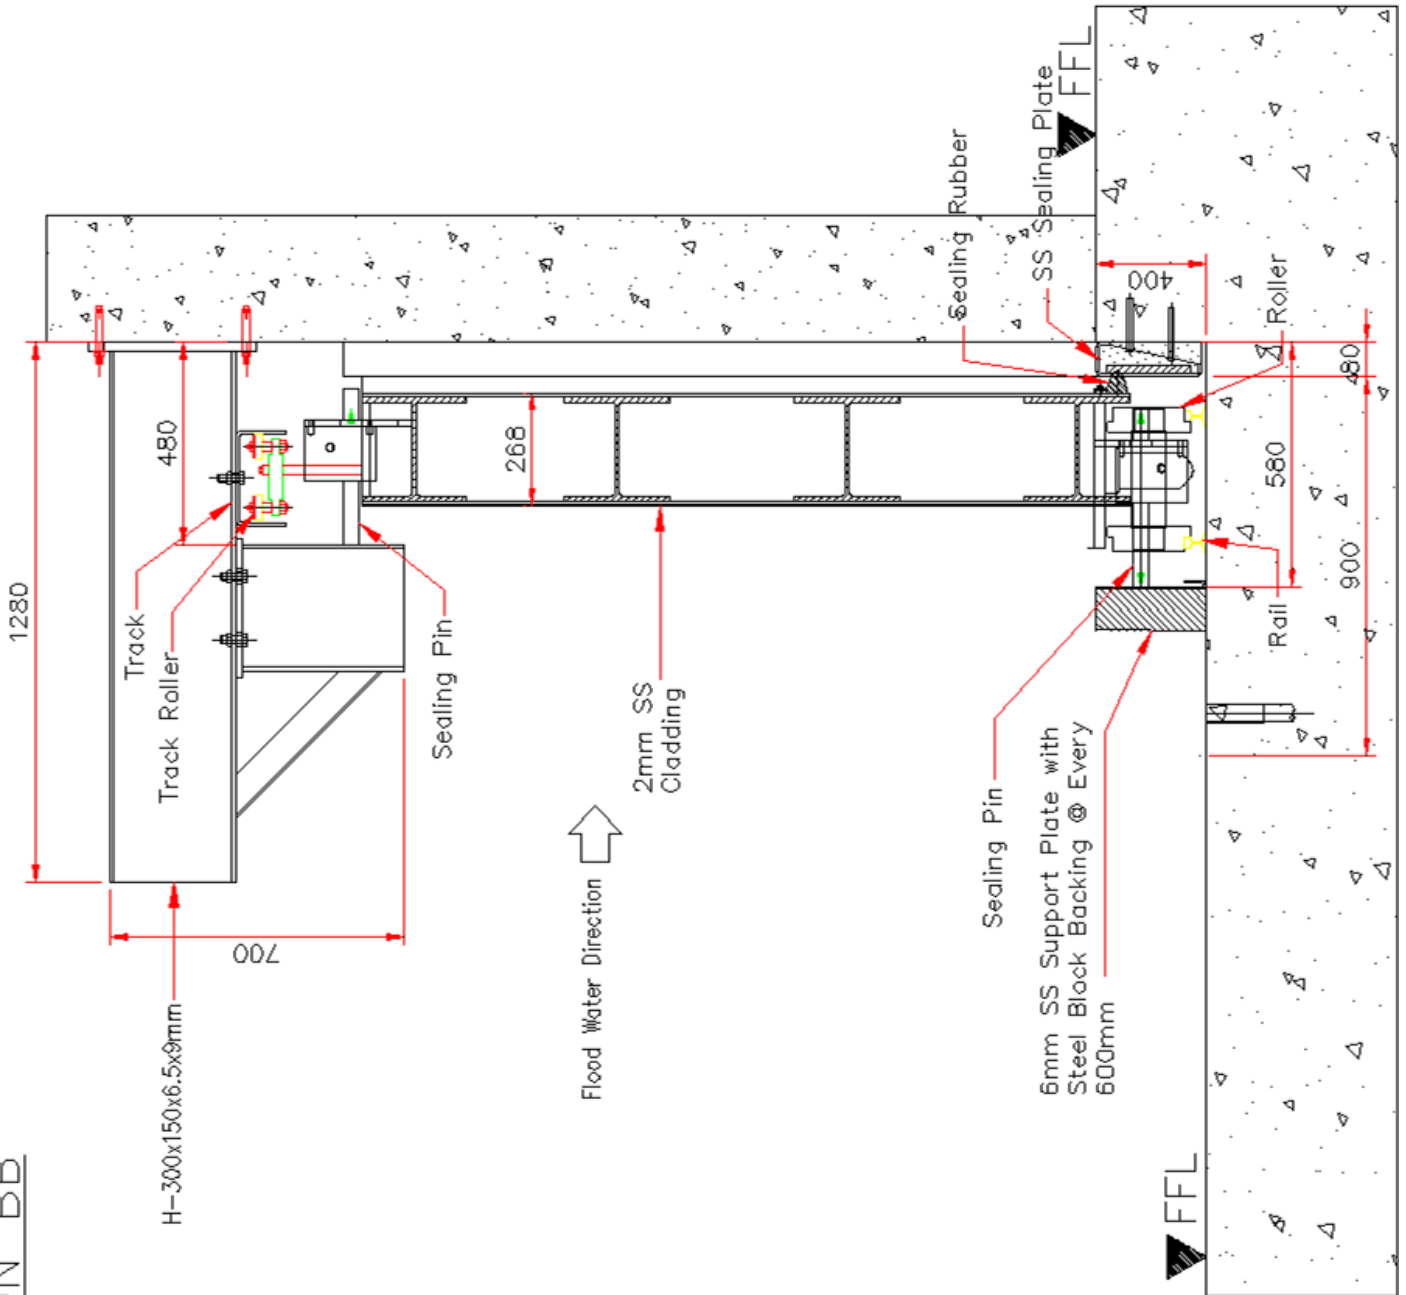

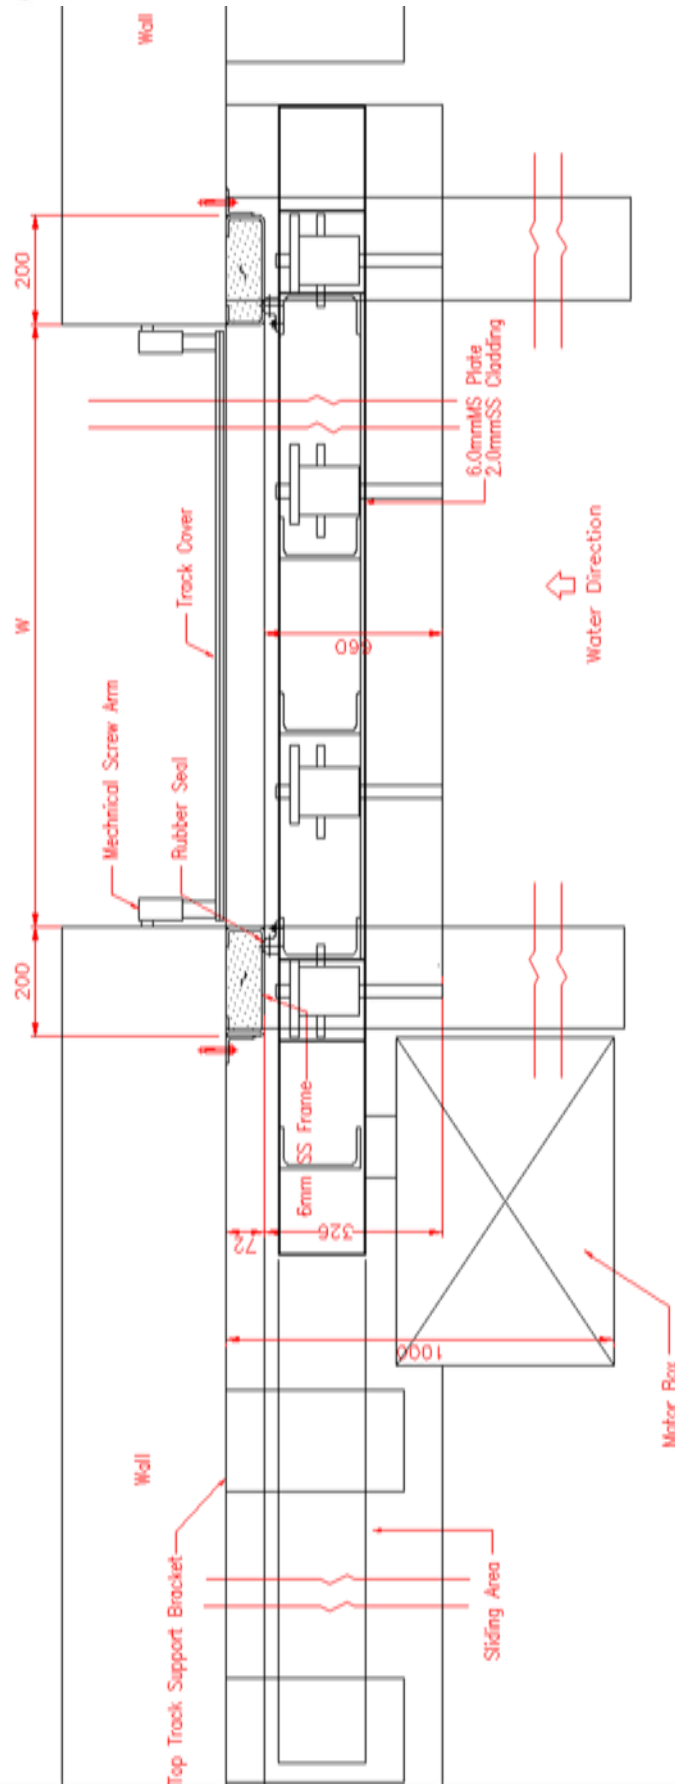

All MS-S series products are recommended to undergo maintenance at least once a year and seal replacement every 3 years.

All MS-S series products are fabricated in Taiwan by San Jeou Building Material Industry Co. Ltd and distributed and installed by Delta Technology Pte Ltd.

RISK AND PROPERTY

Risk of damage to or loss of the Goods shall pass to the Buyer at a time when the Goods are handed over to the Buyer after delivery or job completion. The Seller will not be held liable for any damage to the Goods once the Goods is delivered or installation is handed over to the Buyer. The Buyer or any third parties will have to bear the cost of the damaged Goods.

The Seller shall not be held liable or accountable in any way if there is any damage to personnel or property due to improper usage of the Goods by the Buyer or any third parties. Proper safety procedure shall always be observed while operating the Goods.

WARRANTY

The Seller warrants for 12 months that Goods, manufactured by them shall be of sound material and workmanship and that good workmanship shall be employed in assembling parts or materials not manufactured by them. This warranty is given subject to the following:-

The Seller shall be under no liability in respect of any default arising from fair wear and tear, third parties damage, negligence of the Buyer, abnormal working conditions, failure to follow the Seller's product usage instructions (whether oral or in writing), safety procedures, misuse, or alternation or repair of the Goods without the Seller's approval.

The Buyer shall be responsible for ensuring the accuracy of the items (including specification) of any order and the Seller shall be under no liability in respect of any defect in the Goods arising from drawing, design, information or specification supplied by the Buyer.

Whilst every care is taken to ensure the operation of the Goods is satisfactory, no guarantee is given and any warranty is conditional on the Goods being installed, commissioned, serviced and maintained or under extreme weather condition that the product is not design for.

A service agreement is not provided as part of our guarantee but is available at an additional and competitive cost.

Singapore's Distributor & Installer :



www.deltatech.com.sg

Email: enquiry@deltatech.com.sg

TEL: 63822621 FAX: 62813496

NO 34 LOYANG CRESCENT SINGAPORE 508993

Manufacturer :



三久建材工業股份有限公司

No.3, 481 Lane, Dali Rd,
Dali district, Taichung City
<http://www.sjtch.com.tw>